




UTV-P 1.8

COMMERCIAL SOLUTION

- Integral Machine Design, Ultra Slim and Lightweight
- Cloud Control and Management System
- No Parameter-setting Required, Just Plug and Play
- Various Installation Methods: Backrest Support, Seat Installation, and Wall Hanging

Ultra Slim and Lightweight

UTV-P has been engineered with the latest technology to give it a smoother, slimmer profile. The entire poster frame weights less than 32kg, making it more portable and easier to install.

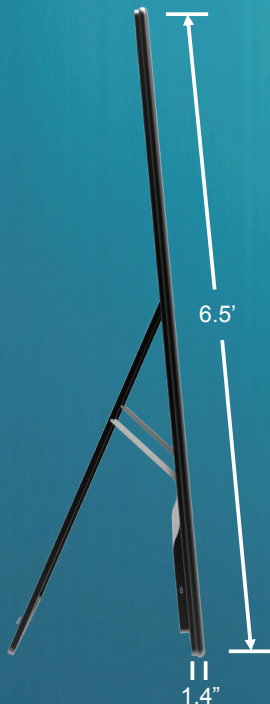

Cloud Control and Management System

The cloud management system helps you manage your content anytime and anywhere. UTV-P makes centralized video control and management workflow via internet delivery possible.


Contact Us

844.263.3675 | www.unilumin-usa.com

Find Us @UniluminUSA



Easy Installation

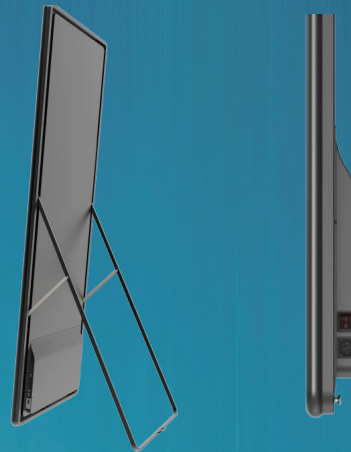

Easy installation with the convenient stand and plug and play setup. You can display with backrest support, seat installation, or wall hanging as well.

Parameter	Value
Pixel Pitch	1.8mm
LED Type	3-in-1 SMD
Brightness	700 cd/m ²
Pixels Per Panel	320 x 1080 px
Pixel Density	308,624pixels /m ²
Weight	30 kg (66.1 lbs)
Module Size	576mm×1944mm / (22.7in x 76.5in)
Cabinet Size	610.2mm×1980.4mm×72.7mm / (24in x 78in x 2.9in)
Aspect Ratio	Varies Dependent on Design
Material	Die-cast Aluminum
Ingress Protection	IP20
Operating Temperature/Humidity	-10°~ +45° / 10~80%RH
Storage Temperature/Humidity	-20°~ +55° / 10~85%RH
Maintenance	Intelligent Front Service
Horizontal / Vertical Viewing Angle	150° / 140°
Color Temperature	2000-9500K Adjustable
Brightness Control	Manual/Automatic
Contrast Ratio	2500:1
Input Power (Max/Typical)	410W / 137W per panel
Video Frame Rate	50/60 Hz
Refresh Rate	2880 Hz
Input Voltage	100~240VAC
Input Power Frequency	50~60 Hz
Processing Depth	13 bit
Calibration	Support Brightness and Chroma
Mounting Configurations	Backrest Support, Seat Installation, and Wall Hanging

Specifications are for reference only and are subject to change without notice.